


■外形寸法図 (単位: mm)

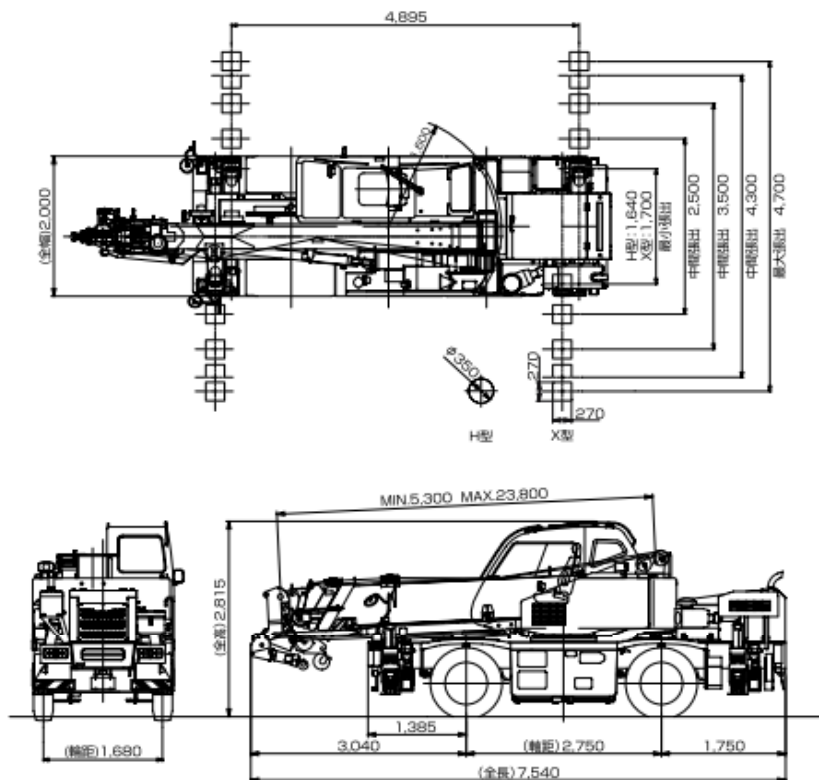

■定格総荷重 (単位: t)

●ブーム/アウトリガ使用時

アウトリガ張出幅		アウトリガ最大張出(4.7m)/全周					
作業半径	ブーム長さ	5.3m	9.0m	12.7m	16.4m	20.1m	23.8m
1.0m	13.00(4.90)	6.00(4.90)					
1.5m	13.00(4.90)	6.00(4.90)	6.00(4.90)				
2.0m	12.00(4.90)	6.00(4.90)	6.00(4.90)	5.00(4.90)			
2.5m	10.00(4.90)	6.00(4.90)	6.00(4.90)	5.00(4.90)	4.70		
3.0m	8.20(4.90)	6.00(4.90)	6.00(4.90)	5.00(4.90)	4.70		
3.5m	7.00(4.90)	6.00(4.90)	6.00(4.90)	5.00(4.90)	4.70	3.20	
4.0m	6.10(4.90)	6.00(4.90)	6.00(4.90)	5.00(4.90)	4.70	3.20	
4.5m		5.50(4.90)	5.30(4.90)	5.00(4.90)	4.50	3.20	
5.0m		4.85	4.80	4.60	4.05	3.20	
5.5m		4.30	4.30	4.20	3.70	3.20	
6.0m		3.85	3.85	3.80	3.40	3.00	
7.0m		3.15	3.10	3.30	2.90	2.60	
8.0m		2.75/7.7m	2.60	2.75	2.50	2.25	
9.0m			2.10	2.35	2.30	1.95	
10.0m			1.80	2.00	2.05	1.75	
11.0m			1.45	1.65	1.85	1.55	
12.0m			1.35/11.4m	1.40	1.55	1.40	
13.0m				1.20	1.30	1.25	
14.0m				1.00	1.15	1.15	
15.0m				0.89	1.00	1.05	
16.0m					0.86	0.93	
17.0m					0.73	0.82	
18.0m					0.63	0.71	
19.0m					0.56/18.7m	0.62	
20.0m						0.54	
22.0m						0.39	
22.3m						0.37	
最小ブーム角度		0°	0°	0°	0°	0°	0°