


■外形寸法図 (単位: mm)

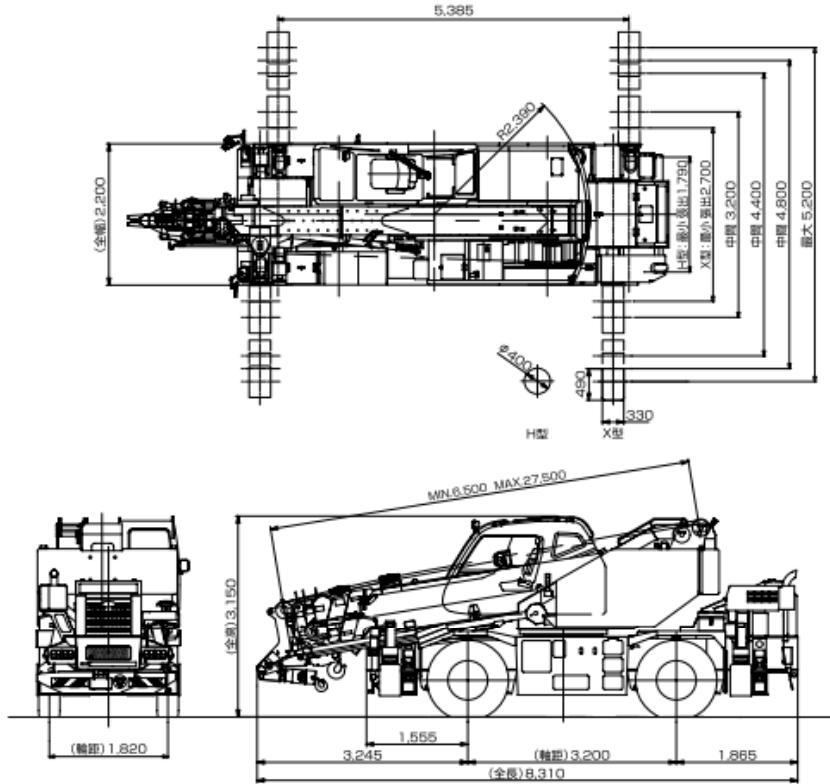

■定格総荷重 (単位: t)

●ブーム/アウトリガ使用時

アウトリガ張出幅		アウトリガ最大張出(5.2m)/全周					
作業半径	ブーム長さ	6.5m	10.7m	14.9m	19.1m	23.3m	27.5m
2.5m	16.00	12.00	9.00	7.00			
3.0m	16.00	12.00	9.00	7.00			
3.5m	14.00	12.00	9.00	7.00	5.00	3.50	
4.0m	12.50	12.00	9.00	7.00	5.00	3.50	
4.5m	11.70/4.4m	11.10	9.00	7.00	5.00	3.50	
5.0m		10.25	8.90	7.00	5.00	3.50	
5.5m		9.40	8.20	7.00	5.00	3.50	
6.0m		8.80	7.60	6.60	5.00	3.50	
7.0m		6.75	6.40	5.80	4.70	3.50	
8.0m		5.30	5.00	5.20	4.15	3.40	
9.0m		4.50/8.6m	4.00	4.30	3.70	3.10	
10.0m			3.25	3.50	3.30	2.80	
11.0m			2.65	2.95	3.00	2.55	
12.0m			2.15	2.45	2.65	2.35	
13.0m			1.80/12.8m	2.05	2.25	2.15	
14.0m				1.75	1.95	2.00	
15.0m				1.45	1.70	1.75	
16.0m				1.25	1.45	1.50	
17.0m				1.05	1.25	1.30	
18.0m					1.05	1.10	
19.0m					0.90	0.95	
20.0m					0.75	0.80	
22.0m					0.60/21.2m	0.60	
24.0m						0.45	
最小ブーム角度		0°	0°	0°	0°	0°	0°